




## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 7 : <b>H04L 29/06</b>		A1	(11) International Publication Number: <b>WO 00/64123</b>
			(43) International Publication Date: 26 October 2000 (26.10.00)
(21) International Application Number: PCT/US00/10355 (22) International Filing Date: 17 April 2000 (17.04.00) (30) Priority Data: 09/293,496          15 April 1999 (15.04.99)          US (63) Related by Continuation (CON) or Continuation-in-Part (CIP) to Earlier Application US                                  09/293,496 (CON) Filed on                              15 April 1999 (15.04.99)		(81) Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).  Published With international search report.	
(71) Applicant (for all designated States except US): JFAX.COM, INC. [US/US]; 6922 Hollywood Boulevard 9th Floor, Hollywood, CA 90028 (US). (72) Inventor; and (75) Inventor/Applicant (for US only): D-ANGELO, Leo [US/US]; 3312 Paradise Drive, Tiburon, CA 94920 (US). (74) Agent: COURTNEY, Barbara, B.; Wilson Sonsini Goodrich & Rosati, 650 Page Mill Road, Palo Alto, CA 94304-1050 (US).			

(54) Title: SYSTEM CONTROLLING USE OF A COMMUNICATION CHANNEL

## (57) Abstract

A system controlling use of a communication channel in a communication network. The system comprising a network including service nodes. The service nodes comprising one or more sets having one or more nodes adapted to provide service functions in response to messages in the network. At least one of the sets comprising a member node having an interface for communication with a remote terminal, and a user interface process coupled with the interface to include a user of the remote terminal in the network. At least one of the sets comprising a member node having an interface to the communication network, and a process coupled to the interface to control establishment of the communication channel for the user.

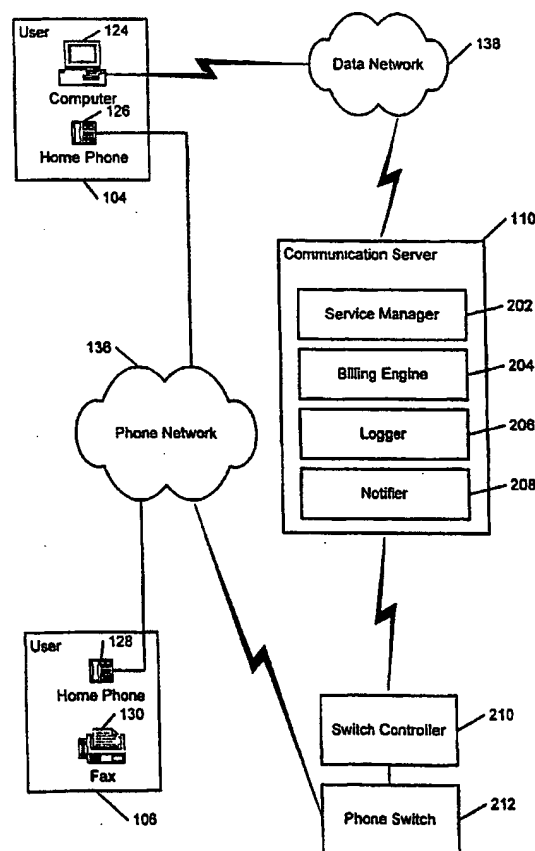

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon	KR	Republic of Korea	PL	Poland		
CN	China	KZ	Kazakhstan	PT	Portugal		
CU	Cuba	LC	Saint Lucia	RO	Romania		
CZ	Czech Republic	LI	Liechtenstein	RU	Russian Federation		
DE	Germany	LK	Sri Lanka	SD	Sudan		
DK	Denmark	LR	Liberia	SE	Sweden		
EE	Estonia			SG	Singapore		

## SYSTEM CONTROLLING USE OF A COMMUNICATION CHANNEL

### BACKGROUND OF THE INVENTION

#### Field of the Invention

This invention relates to the field of communications networks. In particular, the invention relates to a system for controlling the use of a communication channel in a communication network.

#### Description of the Related Art

Communications systems are comprised of several distinct networks. The public switched telephone network (PSTN) is one example. Others include the facsimile network. Although facsimile machines typically transmit facsimiles using the PSTN, facsimile machines do not interoperate with the voice content of the PSTN. In that sense, facsimile machines form a distinct network of communications devices that are not easily linked with the PSTN. Similarly, pagers form a network of devices. Other networks include data transmission networks such as the Internet and private networks. Also, voice over IP is becoming more common and that forms another network.

Each network operates on a different set of protocols and it is difficult for a user of one network to communicate with a user on another network using the network of their choice. It can also be difficult for individual users of a single network to communicate with multiple people on the same network simultaneously.

Accordingly, what is needed is a system for allowing users of different communications networks to communicate with one or more users through a single interface that will control the communications channels used.

### SUMMARY OF THE INVENTION

A system for controlling the use of communication channel in a communication network is described. The system includes a network such as an

Ethernet, a private Intranet, a subnetwork of the public Internet, or some other type of network. The network has service nodes that are grouped into multiple sets. Each set may have one or more service nodes of the same type. For example, one set of service nodes might provide billing functions. There might be  
5 four service nodes in the billing function set.

One of the sets has a member node with an interface for communicating with a remote terminal. The interface is coupled to a user interface process to include a user of a remote terminal in the network. The user interface process may be the Rendezvous™ Routing Daemon or some other interface that allows  
10 the user at the remote terminal to contact the network and send messages to the service nodes. One of the sets has a member node with an interface to the communication network. This might be a switch controller. The switch controller has a process coupled to the interface that controls the establishment of a communication channel for the user.

15 The system may include logic to receive requests to contact one or more people from the remote terminal, forward messages into the network, respond to requests and forward messages in the network concerning the requests to the remote terminal. For example, a user might request a conference call between herself/himself and three other people. A message would be sent from the remote  
20 terminal to the user interface process and then be forwarded into the network. Messages concerning the status, routing, and other aspect of the conference call are forwarded from the network to the remote terminal.

In one embodiment, each request is assigned a unique transaction identifier. In one embodiment once a transaction identifier has been assigned, it is  
25 included with all messages concerning that transaction in the network.

In one embodiment, each of the sets of service nodes is part of a distributed queue. The distributed queue enables the requests for service functions to be distributed amongst all of the service nodes performing like functions.

30 In one embodiment, the service nodes use the multicast protocol to send messages to one another. In another embodiment, the user datagram protocol is

used to send messages. In another embodiment, the transmission control protocol over Internet Protocol (IP) is used to send messages.

In one embodiment, the service nodes of the system are located in a private subnetwork.

5           The communication network may be the public switched telephone network, a voice over IP network, or some other type of communication network.

          The communication channel may comprise a voice channel, a data channel, a voice conference channel, or some other type of channel in the  
10       communication network.

          One of the service functions may be to act as a service manager. The service manager acts as an intermediary between messages from the remote terminal and the rest of the system. The service manager receives user requests for communication channels, requests validation of the account information in  
15       the requests, and forwards the requests to a switch controller in response to the validation.

          One of the service functions is a billing function. The billing function receives requests for the use of communication channels, validates account information in the requests and stores information about the use of  
20       communication channels. The billing function may also charge credit cards for the use of communication channels and communication services.

          Another service function is a logging function. The logging function includes the ability to monitor the messages in the network and to store messages matching predefined criteria. The logger function also includes the  
25       ability to retrieve stored messages and generate a representation of the status of the system.

          One of the service functions is a notifier. The notifier responds to messages matching predefined criteria with a specified action. The notifier may respond to error conditions by contacting an operator of the system using the  
30       communication network. The notifier may also store user request for use of communication channels and until a specified time and then forward the request into the network at the specified time.

Another service function is the switch controller. The switch controller receives requests for use of communication channels and forwards the requests into the communication network. The switch controller receives status information about the communication channels and the communication network.

- 5 The switch controller forwards status information to the remote terminal. The switch controller also monitors the remaining credit available for the user and requests additional credit when the available credit falls below a predetermined amount. The switch controller can terminate the use of a communication channel when the available credit reaches zero.

- 10 In some embodiments, the system is embodied on a computer program product on a computer usable medium such as CD-ROM or floppy diskette. The computer usable medium has computer readable program code for causing a computer to control communication session. The computer program has instructions that receive requests from a user to communicate with a person. The  
15 program has instructions for composing a message to a communication server, such as the above system, requesting communication session. The program has instructions for monitoring the status of the communication session and for controlling the communication session.

- The computer program has instructions for identifying the current  
20 location of the user and the current phone number at that location for the user. The program also has instructions for identifying the user account information and for requesting a phone number or determining a phone number for the person being called.

- The computer program includes instructions for generating a message  
25 including a phone number for the user and a phone number for each person being contacted together with the account number for the user. The computer program includes instructions for sending a message over the network to the communication server.

- The computer program has instructions for inserting a time for the  
30 communication session into the message and communicating that to the communication server. This can be used to setup a conference call at a designated time.

The computer program includes instructions to receive status messages from the communication server. The status messages can indicate the on-hook, off-hook, and ringing status of all of the parties to the call. The computer program can update the computer display to reflect the status of the parties to the communication session. In one embodiment, icons are used to show a ringing  
5 phone, a phone off-hook and a phone on-hook response to the status of each phone.

The computer program includes instructions for adding people to the communication session, removing people from the communication session,  
10 muting a participant's ability to speak, and placing a caller on hold during the communication session. The computer program also includes instructions for indicating that the communication session should end.

When multiple participants to the communication session are using the communication server, the computer program supports messaging over a data  
15 network to other users of the communication server.

The computer program includes instructions for locating a person and requesting status information from the communication server about the person. The status information might indicate the current phone number of the person and whether or not the person is on the phone.

20 The computer program includes instructions for requesting billing information about services used.

One embodiment supports anonymous communication between two people over the public switched telephone network. The method begins with the provision of each person's phone number to a computer rather than to each  
25 other. The computer then calls the first person and the second person on a conference channel in the public switched telephone network. The two parties are able to communicate without giving away their phone numbers. In one embodiment a link is included on a web page to allow someone viewing a web page to communicate anonymously with another party. In another embodiment,  
30 a link is included in a chat room to allow two participants of the chat room to have an anonymous conversation.

One embodiment a computer library provides a set of message definitions and service function interfaces. The message definitions include account message definitions, member message definitions, and call message definitions. The service function interfaces include interfaces for a service manager, a billing manager, a notifier, a logger and a switch controller. The interfaces describe the program calls that the service functions must implement.

### BRIEF DESCRIPTION OF THE FIGURES

Fig. 1 is a block diagram showing a communication commerce server.

Fig. 2 is a block diagram showing how one embodiment of the communication commerce server can control communications channels between a subscriber and a non-subscriber.

Fig. 3 is a block diagram of an embodiment of a communication commerce server.

Fig. 4 is a block diagram of a phone switch.

Figs. 5A-B are process flow diagrams demonstrating a method for setting up a telephone call in one embodiment of the invention.

Fig. 6 is a block diagram of a user interface for controlling the communication server.

20

### DETAILED DESCRIPTION

#### A. System Overview

Figure 1 is a block diagram showing a communication commerce server. A communication commerce server can be used to

This paragraph lists the elements of Figure 1. Figure 1 includes a set of communication networks 100, a user 102, a user 104, a user 106, and a communication server 110. The set of communication networks 100 comprises a pager network 132, a voice over Internet Protocol (IP) network 134, a phone network 136, a data network 138, and a facsimile network 140. The user 102



has a cell phone 112, an office phone 114, a home phone 116, an office facsimile machine 118, a personal digital assistant (PDA) 120, and an office computer 122. The user 104 has a computer 124 and a home phone 126. The user 106 has a home phone 128 and a facsimile machine 130.

5           This paragraph describes the interconnections between the elements of Figure 1. The cell phone 112, the home phone 116, the home phone 126, and the home phone 128 are coupled in communication with the phone network 136. The office phone 114 is coupled in communication with the voice over IP network 134. The office facsimile machine 118 and the facsimile machine 130  
10       are coupled in communication with the fax network 140. The PDA 120 is coupled in communication with the pager network 132. The office computer 122 and the computer 124 are coupled in communication with the data network 138. The PDA 120, the office computer 122 and the computer 124 are coupled in communication with the communication server 110. The communication server  
15       110 is coupled in communication with each of the networks in the set of communication networks 100.

Each of the elements of Figure 1 will now be described. The set of communications networks 100 is a collection of different communication networks. In one embodiment, the set of communications networks includes the  
20       phone network 136 and the voice over IP network 134. The phone network 136, sometimes referred to as the public switched telephone network (PSTN), addresses each station according to a numbering plan. In North America, the North American Numbering Plan (NANP) is used and each phone line has a ten-digit phone number in the form of a three-digit area code followed by a seven-  
25       digit number. Numbers are assigned to phone lines, not individuals. Consequently, a single person may have multiple phone numbers. In contrast, the IP network uses an IP address where under the IPv4 standard, each address is four bytes. The IP address is linked to a specific station, not with a user, so a single person may have multiple IP addresses. Therefore, users of the phone  
30       network 136 can contact each other by using the ten-digit number and users of the voice over IP network 134 can contact each other by using the IP address.

However, users solely on the two different networks cannot contact each other without some additional bridge.

The facsimile network 140 has typically been thought of as a subset of the phone network 136. This is because most facsimile machines communicate over the PSTN. However, facsimiles may be sent over data networks such as the Internet or the data network 138. Similarly, facsimile machines can operate over networks such as the voice over IP network 134. Typically, facsimile stations are addressed according to the NANP. The facsimile network 140 is distinct from the phone network 138 because a user solely on the two different networks cannot contact the other without some additional bridge. For example, a user with solely a traditional phone cannot send a facsimile to a facsimile machine without some additional bridge. Additionally, a facsimile machine coupled to the data network 138 may not be able to communicate with a facsimile machine coupled to the phone network 136.

The pager network 132 is typically addressed according to the NANP. However, many pagers can also be addressed over data networks such as the Internet or the data network 138. Although pagers can be contacted by users of the phone network 136, that is solely because the paging companies install specialized bridging software that receives the telephone call and decodes the dual tone multi-frequency (DTMF) signals to send a message to the pager over the paging network.

The data network 138 is a data network such as the Internet, a Local Area Network (LAN), a Wide Area Network (WAN), or some other type of data network. The data network may operate over other networks such as the phone network 136. Data networks are typically not designed for voice communication. However, protocols such as voice over IP do allow voice communication over the data network 138. Users of the data network 138 cannot communicate by voice with users of the phone network 136 without some additional bridge.

The communication server 110 serves to bridge the different networks in the set of communications networks 100. The communication server 110 also provides a uniform mechanism for allowing users to contact other people. The

communication server 110 also provides a unified billing mechanism for the multitude of communication services used by a user.

The user 102, the user 104, and the user 106 are individuals. The user 102 and the user 104 are users of the communication server 110. The user 106 is an individual who does not use the communication server 110. The users 102-106 have a number of different contact points and mechanisms as shown by FIG. 1. For example, the user 102 has six different ways she/he can be contacted: the cell phone 112, the office phone 114, the home phone 116, the office facsimile machine 118, the PDA 120, and the office computer 122.

When the user 106, who is not a subscriber to the communication server 110, wants to contact the user 102, the user 106 must perform a number of steps. The user 106 must select a communication network. The user 106 must find the address for the user 102 in that communication network and the user 106 must provide the address for the user 102 in that communication network to their communication device. If the user 106 is not sure whether the user 102 is at her/his home or office, the user 106 may not know which phone number to dial to contact the user.

In contrast, the communication server 110 facilitates easier communication between the user 102 and her/his contacts. The user 102 accesses the communication server 110 and identifies her/his present location. Then, the user 102 identifies a person to contact, the person need not be a subscriber to the communication server 110. The communication server 110 then controls the communications channels between the user 102 and the other person or persons.

The communication server 110 may be composed of a variety of service nodes. The service nodes the service nodes may each run a variety of programs to provide service functions. It is also possible for a single service node to provide multiple service functions. The service nodes may be located in a single location or distributed in different locations. Typically the service nodes that provide control over telecommunications network equipment will be located in proximity to the network equipment. Consequently, the service nodes may be distributed in multiple locations and connected by a private network.

The term communication server can refer to all of the service nodes and service functions, but is also used to refer to a subset of the service nodes and service functions that includes all of the service nodes other than the switch controller nodes and switch controller functions. This terminology is used because a carrier can set up multiple switch groups based on capacity and demand in various locations (see FIG 3).

#### B. Placing Calls

Figure 2 is a block diagram showing how one embodiment of the invention can control a communications channel between a subscriber and a non-subscriber. Figure 2 also demonstrates how the communication server 110 serves as a bridge between different communications networks and how the communication server 110 selects and controls a communication channel.

This paragraph lists the elements of Figure 2. Figure 2 includes the user 104, the user 106, the communication server 110, the phone network 136, the data network 138, a switch controller 210, and a phone switch 212. The communication server 110 is comprised of a service manager 202, a billing engine 204, a logger 206, and a notifier 208.

This paragraph describes the interconnections between the elements of Figure 2. The computer 124 is coupled in communication with the data network 138. The data network 138 is coupled in communication with the communication server 110. The communication server 110 is coupled in communication with the switch controller 210. The switch controller 210 is coupled in communication with the phone switch 212. The phone switch 212 is coupled in communication with the phone network 136. The phone network 136 is coupled in communication with the home phone 126 and the home phone 128.

Each element of Figure 2 will now be described. The user 104 connects to the communication server 110 over the data network 138 using the computer 124. The computer 124 can run a program for communicating with the communication server 110 or the communication server 110 can be contacted using a web browser program over the World Wide Web (WWW). Once the user 104 identifies herself/himself and her/his location to the communication

server 110, the user 104 can contact individuals using the interface with the communication server 110. The user 104 can signal that she/he wants to contact the user 106 by selecting the user 106 from a list or by some other means. If the user 106 has multiple contact locations and is not a subscriber to the communication server 110, then the user 104 will be prompted to select a contact location. However, if the user 104 wanted to contact the user 102, a subscriber to the communication server 110, the communication server 110 can determine the correct contact location for user 102 without additional prompting because the user 102 would also have identified her/his location to the communication server 110 when she/he identified herself/himself to the communication server most recently.

Once the contact number has been selected, here the home phone 128 for the user 106, the client program on the computer 124 sends a message over the data network 138 to the communication server to initiate a call. The message may be encrypted. The communication server 110 receives the message in the service manager 202.

The service manager 202 may perform some basic checks and verification on the message and then sends the message to the billing engine 204. The billing engine 204 validates the request. The validation process includes checking the account of the requesting user and authorizing the call. The validation process can also include charging the credit card associated with the account of the user 104. The billing engine 204 sends a message to the service manager 202 to initiate the call once the account information has been validated. Upon receiving the validation from the billing engine, the service manager 202 will instruct the switch controller 210 to initiate the call.

The switch controller 210 is able to control the phone switch 212. The phone switch 212 then calls both the initiating party, here the user 104, and the receiving party, here the user 106. As the phone switch 212 calls the parties, messages are sent back through the switch controller 210 to the client program on the computer 124 to display the ringing and call status of the phone lines of the participants to the call. The display on the computer 124 can be updated to

reflect the ringing and on-off hook status of the phone lines for each participant in response to the messages from the switch controller 210.

Throughout the call, the switch controller 210 will monitor the remaining credit on the account. If more credit is needed, the credit card associated with the account of the user 104 can be charged while the call is in progress. This is  
5 done by the switch controller 210 sending a message to the billing engine 204 to request more credit. The communication server 110 also supports conference calls where each party pays for her/his leg of the call.

The client program on the computer 124 allows the user 104 to add other  
10 parties to a phone call. The program also allows the user 104 to selectively limit the ability of individual participants to speak during the phone call. The program also allows the user 104 to selectively limit the ability of an individual participant to listen and speak during the phone call. For example, if the user 104 were to signal on the computer 124 that a third party, say the user 102 should be added,  
15 the user 104 could then control which of the other participants could speak and listen with the client program.

The communication server 110 also allows the client programs on the computers such as the computer 124 to send messages to other users that are coupled in communication with the communication server 110. During  
20 conference calls with other subscribers to the communication server 110 this provides a second channel of communication in addition to the voice channels and conference channels being used.

The communication server 110 and the client program on the computer 124 alleviate the need for the user 104 to decide how to route her/his call.  
25 Furthermore, the communication server 110 supports bridging a variety of technologies. For example, the phone switch 212 could be coupled to a voice over IP router and allow communication with the office phone 114 belonging to the user 102 which is coupled in communication with the voice over IP network 134. The user 104 only needs to indicate who she/he wants to contact, the  
30 communication server 110 handles the other details and provides a single, unified, bill for the communications services used.

The logger 206 serves to log the messages transmitted in the network and to store them. The logger 206 provides useful support for monitoring network status and maintaining network operations.

The notifier 208 serves to provide business rule specific responses to messages. For example, the notifier 208 can be programmed to listen for error messages in the network. The notifier 208 can then process the error messages through business rules provided by the operator of the communication server 110 and take appropriate actions. Actions might include paging the network supervisor, contacting multiple staff members by telephone, sending electronic mail messages, shutting down parts of the system such as a faulty switch, or some other actions.

The notifier 208 also supports scheduled conference call notifications. The user 104 can schedule a conference call for a specific time and the notifier 208 can trigger actions to the conference participants at the scheduled time.

#### 15 C. Detailed View of Communication Server

Figure 3 is a block diagram of an embodiment of a communication server together with multiple switch controllers. Figure 3 demonstrates the scalable and distributed nature of the communication server.

The communication server 110 need not run on a single computer or even on a single subnetwork or network. In one embodiment, the components of the communication server 110 are modules that communicate using TIB®/Rendezvous™ messaging over an Internet protocol (IP) network. TIB®/Rendezvous™ is supplied by Tibco, Inc. of Palo Alto, California. The messages can be in user datagram protocol (UDP), multicast protocol, or transmission control protocol (TCP). The Rendezvous™ routing daemon enables the components to be distributed throughout different networks and handles protocol conversions as necessary to enable the components to communicate. The messaging architecture is disclosed in "Apparatus and Method for Providing Decoupling of Data Exchange Details for Providing High Performance Communication Between Software Processes," Marion D. Skeen, et. al., U.S. Pat. No. 5,557,798, filed Dec. 21, 1990.

The components of the communication server 110 are each computer programs, applications, applets, or some other type of program that are coupled in communication with one another. They may be located on a single computer with multiple processors or on multiple computers in different physical locations.

5 In one embodiment, the components of the communication server 110 are located on multiple computers in a single physical facility with two or more IP subnetworks coupled in communication. This configuration supports fault tolerance, redundancy, and load balancing.

In one embodiment, load balancing, fault tolerance, and redundancy are  
10 also supported by using a distributed queue architecture as supplied by the TIB®/Rendezvous™ system. For example, the communication server 110 might have four service managers 202A-D. Each service manager belongs to a single distributed queue, the distributed service manager queue 300. Similarly, there might be four billing engines 204A-D. Each billing engine belongs to a single  
15 distributed queue, the distributed billing engine queue 302. The communication server 110 might have fewer loggers. Here, only two loggers are supplied, the loggers 206A-B. Again, each logger belongs to a single distributed queue, the distributed logger queue 304.

The distributed queue architecture is extremely flexible. For example, the  
20 communication server 110 has only a single notifier currently operating, the notifier 208A. Nonetheless, it belongs to the distributed notifier queue 306. This permits more computer resources to be brought to bear as needed. If an additional notifier is needed, another notifier program can be run, a new computer added, a new network site brought on line, etc., and the distributed  
25 queue architecture will enable the load balancing between the multiple notifiers. In one embodiment, at least one of each service is running on each of the two IP subnetworks at the physical site of the communication server 110. This allows a failure of an IP subnetwork while allowing the communication server 110 to continue to function.

30 A distributed queue also can couple devices that are remotely located as shown by the distributed switch controller queue 308. In this example, there are two carrier switch groups 330A-B. The carrier switch group 330A might be in



New York while the carrier switch group 330B might be in Los Angeles. The distributed switch controller queue 308 might be located in San Francisco along with the other components of the communication server 110.

Each carrier switch group has multiple switch controllers 210A-F and  
5 multiple phone switches 212A-D. There is no fixed number of switch controllers or phone switches that make up a carrier switch group. Each carrier switch group can have any number of resources based on the switching capacity needed for the carrier switch group. If a user has only purchased time with a single carrier, the billing engines 204A-D and the distributed switch controller queue  
10 308 will ensure that calls are only placed over the carrier networks for which the user has privileges.

The switch controllers 210A-F may be running on UNIX workstations such as a Sun™ Sparcstation™ or a Windows™ NT workstation. Products such as Marathon Endurance® from Marathon Technologies of Boxborough,  
15 Massachusetts, can be used to provide additional fault tolerance under Windows™ NT. Marathon Endurance® allows a multiprocessor workstation to have a processor failure and continue to function.

The distributed queues can schedule based on a number of operator defined criteria. The distributed service manager queue 300 primarily uses round  
20 robin scheduling based on current call load. The service managers 202A-D each have a capacity. The service managers 202A-C might have a capacity of 1000 while the service manager 202D might have a capacity of 2000. When the distributed service manager queue assigns a call request to a service manager, it assigns it to the service manager with the highest remaining capacity. Thus, the  
25 first 1000 calls will go to the service manager 202D until the load of all of the service managers is 1000. Each time a call is assigned to a service manager, the capacity is reduced by 1. Once the call is completed, the service manager will increase its capacity by 1. This ensures a relatively even distribution of call load among the service managers it also ensures that when a new service manager is  
30 brought on line, the load is quickly equalized.

The distributed billing engine queue 302 operates in a similar fashion. However, the distributed billing engine queue 302 also ensures that selected

messages are received by each billing engine individually. This supports redundancy because the billing information is on all of the billing engines. The distributed logger queue 304 and the distributed notifier queue 306 perform in the same fashion as the billing engine queue.

- 5           The distributed switch controller queue implements a scheduling algorithm that allows switches to be easily allocated and also allows the deployment of new technology easily. A scheduling algorithm has been developed for the distributed switch controller queue 308 that allows load balancing. Each switch is assigned a weight and a capacity. The weight  
10 corresponds to the general reliability of the phone switch. For example, a new voice over IP phone switch might be assigned a weight of 250 and have a capacity for 1000 channels. The Summa™ 4 switch might be given a weight of 1000 and have a capacity for 4000 channels.

#### D. Detailed View of Phone Switch

- 15           Figure 4 is a block diagram of a phone switch. Figure 4 shows how the communication server 110 is able to communicate with the phone network 136 and other networks.

- The communication server 110 is coupled in communication with the switch controller 210 which is in turn coupled in communication with the phone  
20 switch 212. The phone switch 212 includes conference calling resource 402, voice resource 404, resource card 406, primary rate interface (PRI) 408, and PRI 410. The PRI 408 is coupled to a voice over IP router 412 which is coupled in communication with the voice over IP network 134. The PRI 410 is coupled to a class 4 switch 414 which is coupled in communication with the phone  
25 network 136.

- The phone switch 212 can be a programmable phone switch such as the Summa™ 4, a class 5 switch, or some other type of phone switch. The phone switch 212 is responsive to switch requests and provides switch responses to those requests. The switch controller 210 serves to translate communications  
30 services requests from the communication server 110 into switch requests for the phone switch 212. The switch controller 210 also translates the switch responses

from the phone switch 212 into communication services responses for the communication server 110. The switch controller 210 has device specific control knowledge. If a new type of phone switch is being deployed, only the switch controller 210 needs additional programming.

5           The phone switch 212 is equipped to provide conference calling via the conference calling resource 402. The voice resource 404 enables the phone switch 212 to generate audio prompts. The audio prompts can be announcements like, "Extension Four-One-Three please," or some other spoken text. The audio prompts enable the phone switch 212 to complete calls to called  
10       persons who have a human operated switchboard. The voice resource 404 also can be used to generate prompts such as if credit is running low during a conference call, a message could be played indicating that the call will end in a designated time. The phone switch 212 is also capable of generating and decoding DTMF signals. This enables the phone switch 212 to complete calls to  
15       called persons who have a DTMF reachable extension. It can also be used to contact pagers over the pager network 132. Facsimile resources can be added to the phone switch 212 to support facsimile transmission. The resource card 406 is used by the phone switch 212 to track and monitor the available resources. The resource card 406 is used by the Summa™ 4 switch but may not be used by  
20       other phone switches.

          The PRI's 408 and 410 supply the phone lines. Each PRI supports fifteen analog phone lines. Alternatively, other resources could be used to support phone lines. Depending on the need and the capacity, the phone switch 212 can have more PRI's, conference calling resources 402 and other resources. The PRI  
25       410 handles plain old telephone service (POTS). A class 4 phone switch such as a Nortel DMS 250 or an AT&T 5ESS is used to carry the call from the PRI 410 onto the phone network 136. Alternative configurations are possible, and any programmable phone switch could be used. Or, if at some point, the phone network 136 is modified to allow class 5 switches to carry calls onto the phone  
30       network 136 directly, a Summa™ 4 could directly bring the call from the PRI 410 onto the phone network 136. The PRI 408 is coupled to a voice over IP

router 412. The voice over IP router 412 enables the phone switch 212 to communicate with the voice over IP network 134.

#### E. Detailed Call Setup Flow

Figures 5A-B are process flow diagrams demonstrating a method for setting up a telephone call in one embodiment of the invention. Figures 5A-B show the flexible nature of the communication server 110.

##### 1. Subject Based Messaging

In order to understand the process of Figures 5A-B, it is helpful to understand subject based messaging as used by the components of the communication server 110 in one embodiment of the invention. Although subject based messaging is one messaging technique that can be used in the invention, other messaging systems or other communications architectures may be used. The TIB®/Rendezvous™ messaging system offers publish/subscribe messaging and request/reply messaging.

Publish/subscribe messaging allows a single message to be published on a subject name a single time. Those components interested in a particular subject name subscribe to the subject name. The TIB®/Rendezvous™ software efficiently handles the reliable routing of the messages based on the subject name. Certified message delivery is also supported.

Request/reply messaging is demand driven. Typically it is used by a client to request an individual reply from a server. For example, the service manager can request a reply from the billing engine as to the validity of an account. Again the TIB®/Rendezvous™ software handles the routing of the messages based on subject name.

Subject names in the TIB® system are comprised of multiple components. A full subject is written out by placing a period between each component of the subject name. Thus, the message "TS.CM.STARTCALL" is a single subject name comprised of three components. The components become important because software modules using the TIB® system can subscribe to wildcard subject names. For example, the logger might subscribe to "TS.>"

where the ">" wildcard operator matches if the subject name contains the literal component plus at least one additional subject name component. Messages that would be matched include "TS.CM.STARTCALL", "TS.SM.VALIDATE", "TS.{transID}.ERROR", etc.

- 5           In describing subject names, sometimes a subject name component is written surrounded by braces, e.g. {transID} in "TS.{transID}.ERROR". This convention is used to indicate that the subject name of the message has the current value of the identifier filled in, e.g. for the transaction identifier 945, the subject name would be "TS.945.ERROR".

10           2. Messages

The subject based addressing provides a mechanism for transmitting messages among components of the communication server. There are several common message types that are used by the communication server.

- 15           The messages used by the communication server can all depend off a single base class of messages for service messages. The service messages class is then further divided into subclasses for phone calls, facsimiles, pagers, and other services. The subclasses provide methods and instance variables for network specific functionality. The messages for phone calls will be considered here in detail.

20           a. Call Message

- 25           The call message is used to provide information about call set ups. A call message is comprised of a collection of call specific information together with a collection of member messages. The call message will have one member message for each leg of the conference call. The call message can include the following: a conference call name, a conference call password, a start time, an end time, a transaction identifier, a switch identifier, a login identifier, a time to start the call, and other fields. These fields are not all filled in at once. Throughout the description of the call process, the usage of the fields will be described.

### b. Member Message

Member messages are used to provide information about the people to be contacted. Member messages are typically encapsulated with call messages but, are also sent on their own. In the case of a call message, each leg has a leg  
5 identifier, or legID, the legID 0 is the call originator who can control the call and who is typically billed for all legs of the call.

The member message includes contact information for contacting the person called. The message can include a name, a number, an extension, information about how the extension is reached, a status message, a leg  
10 identifier, an account message, different phone numbers and contact point information, the start and end time for the leg, and other fields. These fields are not all filled in at once. Throughout the description of the call process, the usage of the fields will be described.

### c. Account Message

15 Account messages are used to provide account information and authorization. Account messages typically contain an account number, a password, the current amount of available credit, and other fields. The password may be encrypted. The message also has a field to indicate when the account has been verified. These fields are not all filled in at once. Throughout the  
20 description of the call process, the usage of the fields will be described.

## 3. Call Setup Phase

At step 500, the process starts. The process is shown in parallel, but the steps need not occur in parallel.

At step 502, the service manager subscribes to "TS.CM.STARTCALL".  
25 The service manager could be the service manager 202. This is the subject name that the client will use to request the start of a call. If there are multiple service managers, they belong to a distributed queue that will receive the message and then assign one of the service managers to handle the message.

At step 504, the switch controller subscribes to "TS.SM.STARTCALL". The switch controller could be the switch controller 210. The switch controller 210 is programmed to verify that the message published on "TS.SM.STARTCALL" comes from the service manager. This ensures that the client cannot bypass the billing system.

At step 506, the billing engine subscribes to "TS.SM.VALIDATE". The billing engine could be the billing engine 204.

Next, at step 508, the client publishes a message on the subject "TS.CM.STARTCALL". This is subject name used to start a phone call. The client could be using a WWW interface to the communication server 110 or could be using a program designed to communicate with the communication server 110. The message contents may be encrypted for transmission. The message published is a call message comprised of the call message fields and one member message for each participant including the call originator. The member message for the originator will include an account message. Initially, the client program will fill in a name for the conference, if desired, and a password for the conference, if desired. Neither of those fields is necessary. However, they do allow non-subscribers to join the conference via the conference name over the WWW by the conference call's name. There is a field in the call message that lists the number of current members in the call. That field provides information about how many member messages are part of the call message. A member message will have filled in the name of the person being called, or if it's the originator the name of the originator, then, the phone number where that person is currently and if necessary, their extension and the extension type at that location. The originator's member message will include an account message having user's ID and password filled in. Later, that account message will be validated by the billing engine and the credit available will be filled in.

Next, at step 510, the client subscribes to "TS.SM.STARTCALL."

At step 512, a service manager, via a distributed queue, is assigned to process the message published by the client in step 508 on the subject "TS.CM.STARTCALL". If the message was encrypted over the public Internet, the message is decrypted. The service manager can perform some preliminary

checks on the message contents. Then, the service manager assigns a transaction identifier, or transID, to the call and uses request/reply messaging on the subject "TS.SM.VALIDATE" to have the account information validated by the billing engine. Each account message that is in any of the member messages of the call  
5 message, will be validated. The validation includes providing the amount of available credit and validating the account based on the account number and password provided by the client program.

Next, at step 514, a billing engine, via a distributed queue, is assigned to process the request by the service manager in step 512. The billing engine could  
10 be the billing engine 204. The billing engine is responsible for validating the account information and replying to the service manager. The billing engine can operate in a number of ways. For example, a custom accounting database can be used as can industry standard products such as Portal. Different billing engines can operate on different systems either permanently or during transitions  
15 between billing systems.

Next at step 516, once the account is verified, the billing engine subscribes to "TS.SC.{transID}.>". This allows the billing engine to listen to the published information from the switch controller about the call such as when the line was picked up, etc. These messages are used to bill the user for calls.

20 At step 518, the service manager receives the reply to the "TS.SM.VALIDATE" request and if there are no errors publishes to the subject name "TS.SM.STARTCALL". At this point the call message has been augmented with the account validation information from the billing engine. Additionally, the service manager has already provided a switch ID, the  
25 transaction ID and any other fields that the service manager needs.

Both the switch controller, via a distributed queue, and the client, are listening for the "TS.SM.STARTCALL" subject. At step 520, the client receives a message on the subject "TS.SM.STARTCALL" indicating that the call will be started by the switch, in response, control proceeds to step 522 where the client  
30 subscribes to messages from the switch controller concerning the call on the subject "TS.SC.{transID}.>". This subject is used by the switch controller to publish messages about the call status.



At step 524, the switch controller receives the message on the subject "TS.SM.STARTCALL" indicating that it should initiate the call, in response, control proceeds to step 526 where the switch controller subscribes to messages from the client concerning the call on the subject "TS.CM.{transID}.>". These  
5 subjects are used by the client program to publish messages to control the call. For example, messages on this subject could be used to add legs to the conference call, drop legs from the conference call, add new participants, make participants listen only and end the conference call.

Control then proceeds to step 528 where the call setup phase is complete  
10 and the call itself will take place.

#### 4. Call Process Phase

At step 530, the switch controller has signaled the phone switch to begin the call and whether or not the call has been connected is checked. Control proceeds at step 532 where the switch controller publishes messages on the  
15 subject "TS.SC.{transID}.statusChanged" to indicate call progress. Messages published on that subject include ringing, off hook, and busy. When the original call message requests multiple participants, control proceeds in the loop of steps 530 through 534 until all of the participants are connected. However, once the first participant is connected, they can begin talking to the originator at step 536.

20 At step 534, the client which is subscribed to all of the switch controller messages on the transaction identifier receives the message on the subject "TS.SC.{transID}.statusChanged" and updates the client display appropriately. Control proceeds at step 530 until the call is connected or due to errors, the call cannot be connected.

25 Once the call is connected, control proceeds from step 530 to step 536. At this step, the user of the client is able to conduct her/his conversation. Because the billing engine has authorized the user for a certain amount of time, or money, with the switch controller, the client can directly communicate with the switch controller. The user can control the conference call through  
30 communication with the switch controller on the subjects:

"TS.CM.{transID}.ADDLEG", "TS.CM.{transID}.DROPLEG",

“TS.CM.{transID}.MUTE”, “TS.CM.{transID}.LISTENONLY”, and  
“TS.CM.{transID}.ENDCALL”. The add leg and drop leg subjects are used to  
add and drop legs from the conference call respectively. The mute subject is used  
to mute a person from listening and speaking while muted. The listen only  
5 subject allows a person to listen only and does not allow them to speak while set  
to listen only. The end call message is used to signify the complete end of the call  
by the client. The switch controller handling the conference call receives these  
messages because it is subscribed to the subject “TS.CM.{transID}.>”.

When the call is ended, control proceeds to step 538, the switch  
10 controller generates a service detail record and publishes it on the subject  
“TS.SC.{transID}.SDR”. The service detail record contains the start and end  
times for each leg of the call along with any necessary billing information. The  
start and end times for each leg are filled into the member messages provided to  
the switch controller.

At step 540, the billing engine receives the service detail record because  
15 it subscribed to that subject at step 516. The billing engine enters the details of  
the legs into the billing database and the billing information can immediately be  
queried by the client. The client can always see the most current billing  
information including the most recent call and all of the conference legs and  
20 costs. In some embodiments, some details for a call underway are available as  
well.

#### F. User Interface View

Figure 6 is a block diagram of a user interface for controlling the  
communication server. The user interface could be used to control the  
25 communication server 110.

This paragraph lists the elements of Figure 6. Figure 6 includes a window  
600. The window 600 includes a control buttons and menus pane 602, an action  
pane 604, a status pane 606, a location selection pane 608, a contacts button  
609, a groups button 610, a messages button 612, an account button 614, a  
30 status display 616, and a status display 618. Status display 616 includes status

indicator 620 and participant description 622. Status indicator 618 includes status indicator 624 and participant description 626.

Each of the elements of Figure 6 will now be described. The user interface window 600 displays buttons, controls and panes for controlling the communication server. The panes can be arranged in a number of layouts and might be frames or table entries in a HTML document or panes in a window of a computer program.

The control buttons and menus pane 602 contains menus and control buttons for various operations. The buttons and menus can be context sensitive depending on the selection in the action pane 604, the selection in the status pane 606, the status of the network and the status of the conference call. The control buttons and menus pane 602 includes buttons for adding and dropping participants to a conference call, muting participants to a conference call, setting a conference call participant to listen only, and ending the conference call. The menus include options for configuring user preferences and the import of contact from various sources. For example, contacts can be imported from programs such as Microsoft's Outlook™, ACT™, Schedule Plus, and other personal information managers. The imported contact information is stored in a format usable by the client program. It can be stored on the client computer, on a WWW server or some other computer or server. The current list of contacts can be accessed by signaling on contacts button 609. Additionally, there are control buttons in the control buttons and menus pane 602 that allow contacts to be added and deleted from the client program's contacts list. Other features include the ability to synchronize the contacts list with a contact manager.

The location selection pane 608 displays the current location of the user and allows the user to indicate her/his present location. For example, the location selection pane 608 might indicate "Office". The communication server 110 is then aware that the user is in her/his office and of the phone number for the user at that location. If the user were to signal on location selection pane 608 and change her/his location to "Home", then the location selection pane 608 would indicate that the user is at home. When the user's location changes, the client sends messages to the communication server 110 to update the user's location.

When other users of the communication server 110 want to contact the user, the location information can be used by the communication server 110 to enable them to contact the user without having to selecting the current phone number for the user.

5           The status pane 606 displays call progress information, there is one status display for the user, the status display 616, and one status display for each participant in the phone call. Additionally, the status pane 606 can be customized by the user to show the status of other users of the communication server 110. In this example, the status for a participant in the conference call is shown on the  
10       status display 618.

Each status display has a status indicator and the name and phone number of the person for which the status is being shown. In this example, the status indicator 620 indicates the status of the phone or other communication device for the user of the communication server 110 at their current location as  
15       selected from the location selection pane 608. The status indicator can be an icon or collection of icons based on the type of communications device. In one embodiment, there are icons for a phone on the hook, a phone ringing, a phone busy, and a phone off the hook. The participant description 622 lists the user's name and her or his phone number at the current location. Other information can  
20       be displayed depending on the situation. For example, the client program might have options to show the amount of time in the conference call next to the participant's name or other information relevant to the status display. The status indicator 624 indicates the phone status of the participant. The participant description 626 indicates the participant's name and phone number at the called  
25       location. During the call process, the status indicator 624 will change as the participant's phone rings and then is picked up or determined to be busy.

The action pane 604 displays different information depending on the selected view. The view can be changed using the four buttons at the bottom of the window 600. For example, when the contacts button 609 is selected, the  
30       action pane 604 displays a list of the current contacts. Under the Windows™ operating system each contact's name is listed with a "+" expand selector as used in Windows™ Explorer to enable the user to selectively expand and collapse the

display of information associated with a contact. Each contact has an expandable entry in the action pane 604. When expanded, all of the different phone numbers, email addresses, pager numbers, facsimile numbers and other numbers for a user are expanded. When collapsed only the contract's name appears.

5           When the groups button 610 is selected user-defined groups of contacts are shown as one coherent entry. Again, expand selectors allow the user to selectively expand the list of contacts within a group. The contacts can then be further expanded to show individual contact information. For example, a user might create a group of contacts for the "Merger Working Group" The group  
10 might include contacts at both their user's company and the company with which they are planning to merge. A conference call could simply be made by selecting the "Merger Working Group" in the action pane 604 and signaling that a call should be placed. Additionally, the user can expand the "Merger Working Group" and select individual contacts from the group to contact or message.

15           When the messages button 612 is selected, the action pane 604 shows a message area for messages received and allows the user to send messages. Messages can be sent by selecting participants from the status pane 606 or from the contact list. The message can then be composed in a message entry pane. Once the message is composed, it can be sent by signaling on a button in the  
20 action pane or by some other signal. The messaging system allows a second channel of communication over the data network 138 during a conference call.

          When the account button 614 is selected, the action pane 604 shows user-specific account information including the current bill, up to and including the most recent completed communications transaction.

25           During the conference call, the status displays 616-618 in the status pane 606 can be selected using standard selection techniques to allow multiple continuous and discontinuous status displays. When one or more of the status displays 616-618 are selected, actions from the control buttons and menus pane 602 can affect the selected participants. This allows selective muting, selective  
30 listen only, selective drop and selective messaging of participants.

## G. Additional Functionality

### 1. Prearranged Conference Calls

The communication server allows a user to prearrange a conference call. The user can set a time for a conference call and have the communication server  
5 contact all of the participants. The system can contact subscribers to the communication server at the location they have told the system they are presently at. For the other participants to the conference call, the user setting up the conference call would provide the contact phone number.

### 2. Named Conference Calls

10 It is possible for a user to set up a conference call with a name and optionally a password for others to join. When setting up the call, who will pay the costs for each leg of the call can be controlled by the user. For example, a user could set up a call where each participant pays for her/his own leg of the call. Users would join the call by name in the client software or by entering the  
15 name and password of the conference call on a WWW interface to the communication server. The communication server will handle all of the billing for the calls in accordance with the rules set up by the user.

### 3. Messaging During Calls

While a call is taking place the client software and the WWW interface  
20 can support messaging over the data network 138. The text messaging can occur by selecting one or more people from a list and then typing a text message. Only the selected people receive the text message. This provides a second channel for communication during the phone call without the need for an additional phone call between the parties that want to have an additional private conversation  
25 during the conference call.

The messaging can also take place between any two commerce server users. Further, if a user is not logged on when a message is sent, the message

will be held until the user logs in. Messages can also be sent to alphanumeric pagers.

#### 4. Public-Private Network Environment

Because encryption incurs a relatively high computational cost, it is  
5 desirable to partition the environment into public and private network segments. Messages sent over the public Internet or other data network 138 such as the messages from the client programs to the communication server 110 or to other client programs can be encrypted, signed, or both. In particular the account information published under the "TS.CM.STARTCALL" subject can be  
10 encrypted to prevent unauthorized use of a user's account.

The components of the communication server 110 can be placed behind a firewall and isolated from the public Internet or other data network 138. Therefore, messages on this private network, or subnetwork, need not be encrypted or signed. Similarly, the communication server 110 and the switch  
15 controller 210 can be coupled in communication by a private network or a virtual private network. In one embodiment, a frame relay cloud is used to couple the communication server 110 and the switch controller 210. Therefore, the messages between the communication server 110 and the switch controller need not be encrypted or signed.

20 However, any or all of the messages may be encrypted, signed, or both, to enable the communication server 110 to operate in a more public network environment.

#### 5. Facsimile Transmission

The communication server 110 supports other messages than the ones  
25 described above. For example, facsimile transmission can be handled using the subject name "TS.CM.STARTFAX". Other communication networks can be similarly added and removed. The subject based messaging offers the flexibility to use the same message contents and techniques for multiple purposes. In the case of facsimiles, the message can include the facsimile itself as part of the start

message or as a separate message once the billing engine has validated the account.

#### 6. Voice Interface

The invention supports an interface using the phone network 136 to control the communication server 110. The phone network interface allows a user such as the user 102 to contact the communication server 110 from her/his home phone number and use the communication server 110. The user dials into the communication server 110 and identifies herself/himself. The voice resource 404 provides voice prompts to the user 102 for entering their account number account information and password. The user can then have her/his electronic mail read to them if they have configured the communication server 110 with the appropriate information about their electronic mail accounts. This is supported by the voice resource 404 and the ability of the communication server 110 to access the data network 138. In addition, the communication server 110 can allow the phone network 136 to be used as an interface for setting up conference calls and all of the other features described above. This would allow a user to call into the communication server 110 from an airport or other location, other payphone location and the voice resource 404 can detect and receive signals to allow conference calls and the like to be set up and controlled.

#### 7. Unified Billing

Unified billing by the communication server 110 is supported. The billing engine 204 can provide a single bill for all of the communication services that a user has used. For example, conference calls and regular telephone calls would be listed together with facsimile transmissions as well as paging transactions and other communication transactions. This provides a single source for a user about their communications expenses. The bill is also updated in real time so that as each transaction is completed the bill is available for the user to review.



### 8. Operator Controlled Credit Card Charging

The communication server 110 supports charging a user's credit card incrementally for billing purposes. The operator of the communication server 110 identifies a charge amount, for example \$100. This means that the communication server 110 will request credit in blocks of the charge amount from the user's credit card. While it is not necessary for accounts to be billed by credit card, this functionality is supported. The operator of the communication server 110 can choose to have their users pay each month or by some other arrangement.

When the billing engine 204 validates a start call request, the billing engine 204 will fill in the current amount credit available to the user. The available credit is based on what remains from the last block of credit charged to the user's credit card less the cost of any calls that were made. The credit available is provided to the switch controller 210 as part of the call message.

As the phone call takes place, the switch controller 210 decrements the available credit as it is used. When the remaining credit reaches a threshold set by the operator of the communication server 110, for example \$10, the switch controller 210 sends a message to the billing engine 204 to charge another block of credit, here \$100. If the billing engine 204 is unable to charge the user's credit card another block of credit, the switch controller 210 can use the voice resource 404 of the phone switch 212 to indicate to the conference call participants that the call will be ending and terminate the call when the available credit available is too low to support continuing the call.

If the billing engine 204 is able charge a block of credit, the switch controller 210 will add the block of credit to the credit remaining when it receives the message back from the billing engine 204. For example, if while the billing engine was processing the request for more credit, the remaining credit dropped to \$9. When the additional \$100 comes from the billing engine 204 then \$109 would be available. This process continues as long as the call is in progress and additional credit is needed.

At the end of the call, the remaining credit is provided back to the billing engine 204 by the switch controller 210 for subsequent use.

### 9. LibTSMsg

LibTSMsg offers a simple way for other devices other servers and other clients to be defined for the communications server. LibTSMsg is a linkable program library such as a shared library or dynamic link library. All of the messages are prototyped in LibTSMsg. All of the components are prototyped in LibTSMsg. Specifically there is a core prototype for the various types of services. Additionally, for each of the different services, the service manager, the billing engine, the notifier, the logger, and the switch controller, there are derived classes built off the core prototype. Implementers of any of these services need only provide program code that responds to the defined class methods. This allows different versions of the software to coexist, even if different companies provide the software. For example, the default billing engine could be replaced with one designed to work with customized billing software.

Many of the functions in LibTSMsg rely on the TIB®/Rendezvous™ system. The system implements the message passing mechanism used in one embodiment of the communications server.

### 10. Integrated LDAP Server

The lightweight directory access protocol (LDAP) is an Internet protocol for directories. The communications server 110 supports integration with an LDAP server. The LDAP server can be used to look up member status, to locate contact numbers for members, and for other purposes.

The client program or the World Wide Web (WWW) interface allows a user of the communications server 110 to control what information is available on the LDAP server. For example, a user could allow none of their personal information to be published on the LDAP server. Alternatively, the user could allow their name to be looked up only by people with permission to do so. Another option is to allow anonymous contact only. This would allow people to contact them by entering their name and using the client program or the WWW

interface only. This allows the user to be contacted without giving out their phone number.

### 11. Anonymous Phone Calls

The communications server can also be used to support anonymous  
5 phone calls. This can be used in chat rooms such as the Internet Relay Chat (IRC) or some other sort of chat room. It can also be used in a hypertext markup language (HTML) document served over the WWW. This allows a user of the chat server or a viewer of the WWW page to call another user without distributing their phone number. The operator of the chat service or WWW page  
10 provides a button or link on the screen that allows two or more users to call each other. Each user would provide their phone number over the chat service connection or the hypertext transfer protocol (HTTP) connection. The information might be encrypted during transit. The chat server or web server would then communicate the numbers to the communications server and a phone  
15 call would be initiated between the parties.

This is a useful feature in situations where two users do not want to distribute their numbers to each other but do want to communicate with each other.

### 12. Software

20 In some embodiments, the programs used in the commerce server 110, the service manager 202, the billing engine 204, the logger 206, the notifier 208, and the switch controller 210 are included in one or more computer usable media such as CD-ROMs, floppy disks, or other media.

Some embodiments of the invention are included in an electromagnetic  
25 wave form. The electromagnetic wave form comprises information such as the commerce server 110 programs, the service manager 202 programs, the billing engine 204 programs, the logger 206 programs, the notifier 208 programs, and the switch controller 210 programs. The electromagnetic waveform might include the programs accessed over a network.

#### H. Conclusion

The description of various embodiments of the invention has been presented for purposes of illustration and description. It is not intended to limit the invention to the precise forms disclosed. Many modifications and equivalent  
5 arrangements will be apparent. Therefore, persons of ordinary skill in this field are to understand that all such equivalent structures are to be included within the scope of the following claims and their legal equivalents.

## CLAIMS

What is claimed is:

1. A system controlling use of a communication channel in a communication network, the system comprising:
  - 5 a network including a plurality of service nodes, the plurality of service nodes comprising one or more sets having one or more member nodes adapted to provide respective service functions in response to messages in the network;
  - at least one of the sets comprising a member node having an interface for  
10 communication with a remote terminal, and a user interface process coupled with the interface to include a user of the remote terminal in the network;
  - at least one of the sets comprising a member node having an interface to the communication network, and a process coupled to the interface  
15 to control establishment of the communication channel for a user.
2. The system of claim 1, wherein the process includes logic to receive a user request to contact one or more people from the remote terminal, to forward messages into the network in response to the request and to forward messages in the network concerning the request to the remote terminal.
- 20 3. The system of claim 1, wherein the process includes logic to establish a transaction identifier in response to a request, and to send a message to the network including the transaction identifier.
4. The system of claim 1, wherein the network includes logic to assign a member node in a set including more than one member node to provide the  
25 service function provided by the set for a transaction involving the use of a communication channel by a user.

5. The system of claim 4, wherein the logic to assign a member node comprises a distributed queue.
6. The system of claim 1, wherein the plurality of service nodes in the network execute a multicast protocol by which messages in the network are  
5 received by the service nodes in the network.
7. The system of claim 1, wherein the service nodes in the network include network protocol drivers for a user datagram protocol UDP multicast network over a frame relay.
8. The system of claim 1, wherein the service nodes in the network include  
10 network protocol drivers for a transmission control protocol TCP over internet protocol IP multicast network over a frame relay.
9. The system of claim 1, wherein the service nodes in the network include network protocol drivers for a private multicast domain.
10. The system of claim 1, wherein the user interface process comprises a  
15 TCP/IP network protocol driver supporting communication between the remote terminal and the user interface process.
11. The system of claim 1, wherein the communication network comprises a public switched telephone network.
12. The system of claim 11, wherein the communication channel comprises a  
20 voice channel in the public switched telephone network.
13. The system of claim 11, wherein the communication channel comprises a data channel in the public switched telephone network.
14. The system of claim 11, wherein the communication channel comprises a voice conference channel in the public switched telephone network.
- 25 15. The system of claim 1, wherein one of the service functions is a service manager function.

16. The system of claim 15 wherein the service manager function includes logic to receive a user request for use of the communication channel, to validate account information in the request, and to forward the request to a switch controller in response to the validation.
- 5 17. The system of claim 1, wherein one of the service functions is a billing function.
18. The system of claim 17 wherein the billing function includes logic to receive a request for use of the communication channel, to validate account information in the request, and to store information about the use of the  
10 communication channel.
19. The system of claim 17 wherein the billing function includes logic to charge a credit card for the use of the communication channel.
20. The system of claim 1 wherein one of the service functions is a logger function.
- 15 21. The system of claim 20 wherein the logger function includes logic to monitor the messages in the network and to store messages matching predefined criteria.
22. The system of claim 20 wherein the logger function includes logic to retrieve stored messages and generate a representation of the current status of  
20 the network.
23. The system of claim 1, wherein one of the service functions is a notifier function.
24. The system of claim 23 wherein the notifier function includes logic to respond to messages matching predefined criteria with specified actions.

25. The system of claim 23 wherein the notifier function includes logic to respond to error conditions in the network by contacting an operator of the system using the communication network.
26. The system of claim 23 wherein the notifier function includes logic to  
5 store a user request for use of the communication channel until a specified time and to forward the request into the network at the specified time.
27. The system of claim 1, wherein one of the service functions is a switch controller function.
28. The system of claim 27 wherein the switch controller function includes  
10 logic to receive requests for use of the communication channel, to forward the requests into the communication network, to receive status information about the communication channel and the communication network from the communication network, and to forward the status information to the remote terminal.
- 15 29. The system of claim 27 wherein the switch controller function includes logic to monitor the available credit for the user, to request additional credit when the available credit falls below a predefined amount, to terminate the use of the communication channel when the available credit reaches zero.
- 20 30. A computer program product comprising:  
a computer usable medium having a computer readable program code embodied therein for causing a computer to control of a communication session, and the computer readable program code comprising:  
a set of instructions for receiving a request from a user to  
25 communicate with at least a first person;  
a set of instructions for composing a message to a communication server requesting a communication session;



a set of instructions for receiving information about the status of the communication session; and  
a set of instructions for controlling the communication session.

31. The computer program product of claim 30 wherein the set of  
5 instructions for receiving a request from a user to communicate with at least a first person further comprises:  
a set of instructions for identifying a current location for the user, and the current location including a phone number for the user;  
a set of instructions for identifying an account for the user; and  
10 a set of instructions for identifying a phone number for the at least a first person.
32. The computer program product of claim 30 wherein the set of instructions for composing a message to a communication server requesting a communication session further comprises:  
15 a set of instructions for generating the message, and the message including a first phone number for the user, a second phone number for the at least a first person, and an account number for the user; and  
a set of instructions for sending the message over a network to the communication server.
- 20 33. The computer program product of claim 30 wherein the set of instructions for composing a message to a communication server requesting a communication session further comprises:  
a set of instructions for identifying a time for the communication session;  
and  
25 a set of instructions for specifying the time for the communication session in the message.
34. The computer program product of claim 30 wherein the set of instructions for receiving information about the status of the communication session further comprises:

- a set of instructions for receiving status messages from the communication server, and the status messages indicating on hook, off hook, and ringing status of a first phone number for the user and a second phone number for the at least a first person; and
- 5 a set of instructions for updating a display to reflect the status of the first phone number and the second phone number.
35. The computer program product of claim 30 wherein the set of instructions for controlling the communication session further comprises:
- a set of instructions for sending a message to the communication server
- 10 to add a person to the communication session.
36. The computer program product of claim 30 wherein the set of instructions for controlling the communication session further comprises:
- a set of instructions for sending a message to the communication server
- to remove a person from the communication session.
- 15 37. The computer program product of claim 30 wherein the set of instructions for controlling the communication session further comprises:
- a set of instructions for sending a message to the communication server
- to toggle the ability of a person to speak during the communication session.
- 20 38. The computer program product of claim 30 wherein the set of instructions for controlling the communication session further comprises:
- a set of instructions for sending a message to the communication server
- to toggle the ability of a person to listen and speak in the communication session.
- 25 39. The computer program product of claim 30 wherein the set of instructions for controlling the communication session further comprises:
- a set of instructions for indicating that the communication session should end.

40. The computer program product of claim 30 further comprising:  
a set of instructions for sending messages over a data network to other  
users of the communication server.
41. The computer program product of claim 30 further comprising:  
5 a set of instructions for identifying a person; and  
a set of instructions for requesting status information from the  
communication server about the person, and the status information  
indicating the present phone number of the person and whether the  
person is on the phone.
- 10 42. The computer program product of claim 30 further comprising:  
a set of instructions for requesting a description of communication  
services used from the communication server, and the description  
indicating the services used and the charges associated with the  
services.
- 15 43. The computer program product of claim 30 stored on a computer  
wherein the computer has a network interface for communicating with a remote  
terminal and the computer program product is transmitted over an  
electromagnetic wave form to the remote terminal.
44. The computer program product of claim 30 stored on a computer as an  
20 electromagnetic wave form.
45. A method for providing anonymous communication between a first  
person and a second person over the public switched telephone network, the  
method comprising:  
providing a first phone number for the first person to a computer;  
25 providing a second phone number for the second person to the computer;  
calling the first person and the second person on a conference channel in  
the public switched telephone network responsive to the computer  
receiving the first phone number and the second phone number.

46. A computer program product comprising:  
a computer usable medium having a computer readable program code  
embodied therein for a library of communication service functions,  
and the computer readable program code comprising a plurality of  
5 message definitions and a plurality of service function interfaces.
47. The computer program product of claim 46, wherein one of the message  
definitions includes an account message, and the account message includes an  
account number and a password corresponding to the account number.
48. The computer program product of claim 46, wherein one of the message  
10 definitions includes a member message, and the member message includes a  
name and a phone number corresponding to the name.
49. The computer program product of claim 46, wherein one of the message  
definitions includes a member message, and the member message includes a  
name, a phone number corresponding to the name, and an account message.
- 15 50. The computer program product of claim 46, wherein one of the message  
definitions includes a start call message, and the start call message includes a  
plurality of member messages.
51. The computer program product of claim 46, wherein one of the message  
definitions includes a start call message, and the start call message includes a  
20 plurality of member messages and a transaction identifier.
52. The computer program product of claim 46, wherein one of the service  
function interfaces defines the program calls for a service manager function.
53. The program calls for a service manager function of claim 52, further  
comprising program calls for receiving requests for the use of a communication  
25 channel.
54. The program calls for a service manager function of claim 52, further  
comprising program calls for requesting verification of account information.

55. The program calls for a service manager function of claim 52, further comprising program calls for selecting a communication network.
56. The program calls for a service manager function of claim 52, further comprising program calls for selecting a communication network from a plurality  
5 of communication networks and sending a message to start a call over the communication network.
57. The computer program product of claim 46, wherein one of the service function interfaces defines the program calls for a billing manager function.
58. The program call for a billing manager function of claim 57, further  
10 comprising calls for receiving a request to validate an account message.
59. The program call for a billing manager function of claim 57, further comprising calls for recording details about usage of a communication channel.
60. The program call for a billing manager function of claim 57, further comprising calls for charging a credit card corresponding to an account.
- 15 61. The computer program product of claim 46, wherein one of the service function interfaces defines the program calls for a notifier function.
62. The program call for a notifier function of claim 61, further comprising calls for storing a set of criteria to match an incoming message and a set of actions corresponding to the criteria.
- 20 63. The program call for a notifier function of claim 61, further comprising calls for performing a set of actions in response to a message matching a set of criteria.
64. The program call for a notifier function of claim 61, further comprising calls for storing a message until a specified time and forwarding the message at  
25 the specified time.

65. The computer program product of claim 46, wherein one of the service function interfaces defines the program calls for a logger function.
66. The program call for a logger function of claim 65, further comprising calls for storing incoming messages.
- 5 67. The program call for a logger function of claim 65, further comprising calls for allowing access to a plurality of stored messages.
68. The computer program product of claim 46, wherein one of the service function interfaces defines the program calls for a switch controller function.
69. The program call for a switch controller function of claim 68, further  
10 comprising calls for receiving call setup information.
70. The program call for a switch controller function of claim 68, further comprising calls for requesting communication services from a telephone switch.
71. The program call for a switch controller function of claim 68, further comprising calls for responding to responses from a telephone switch.
- 15 72. A computer data signal embodied in a carrier wave comprising:  
a computer program for causing a computer to control of a  
communication session, the computer program including  
a set of instructions for receiving a request from a user to  
communicate with at least a first person;  
20 a set of instructions for composing a message to a communication  
server requesting a communication session;  
a set of instructions for receiving information about the status of the  
communication session; and  
a set of instructions for controlling the communication session.

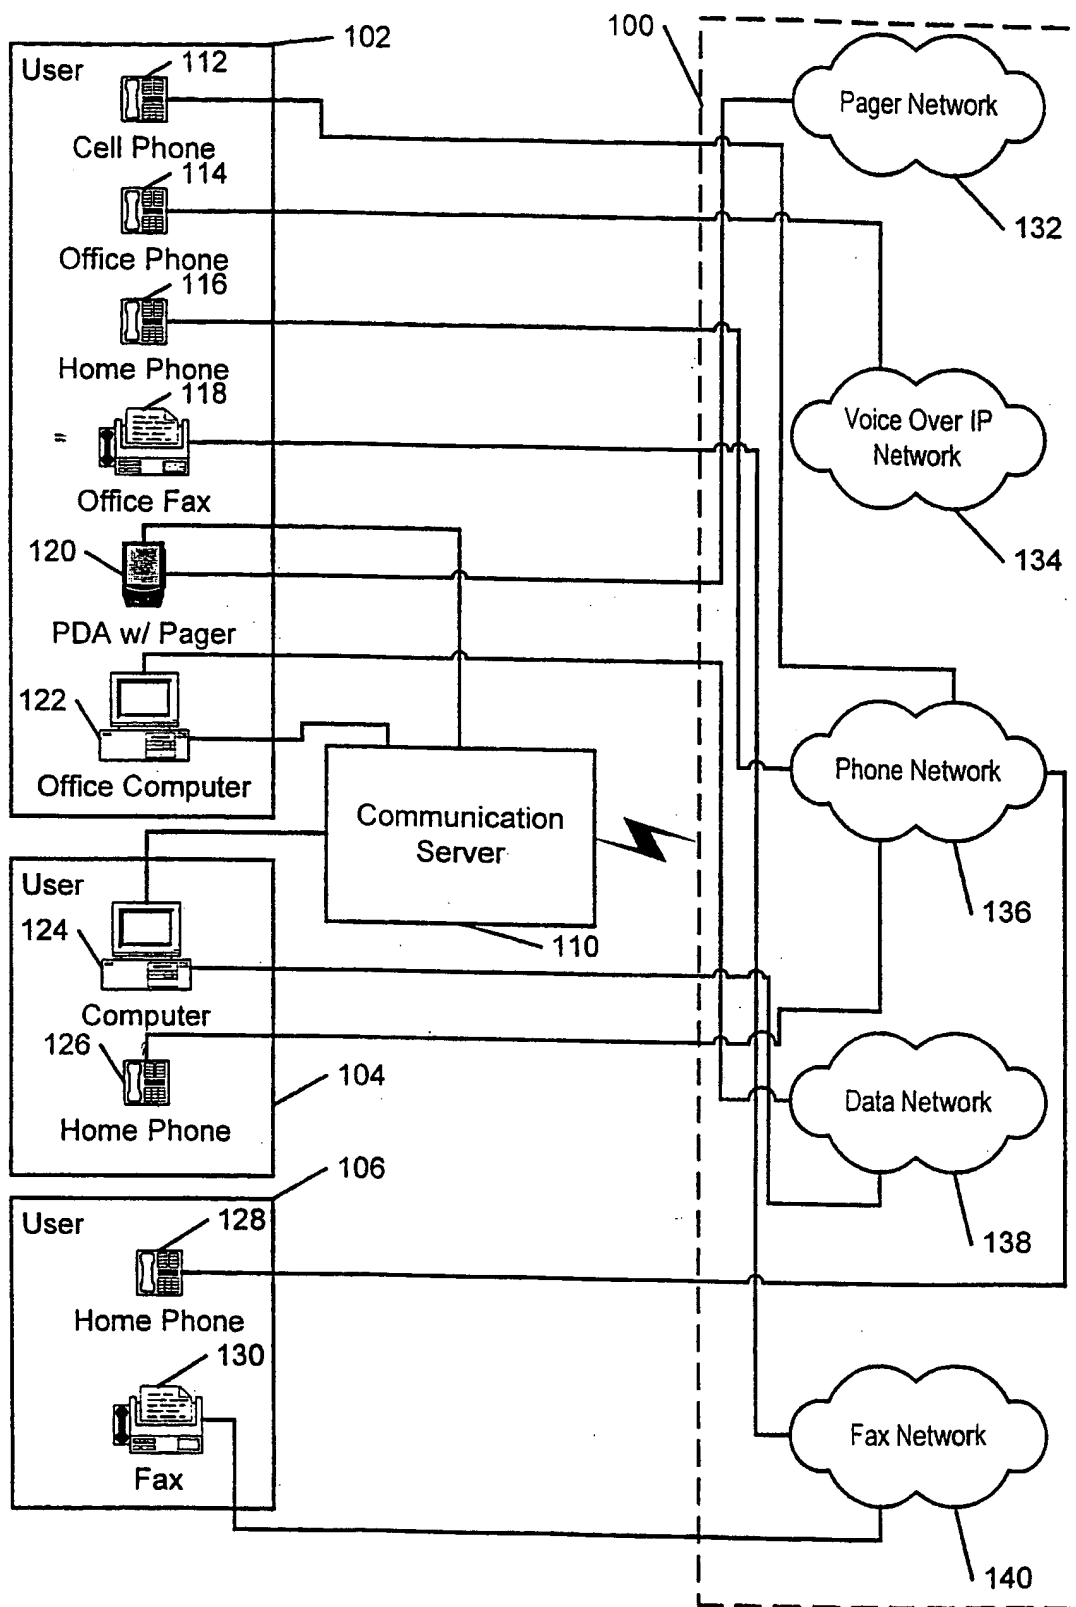
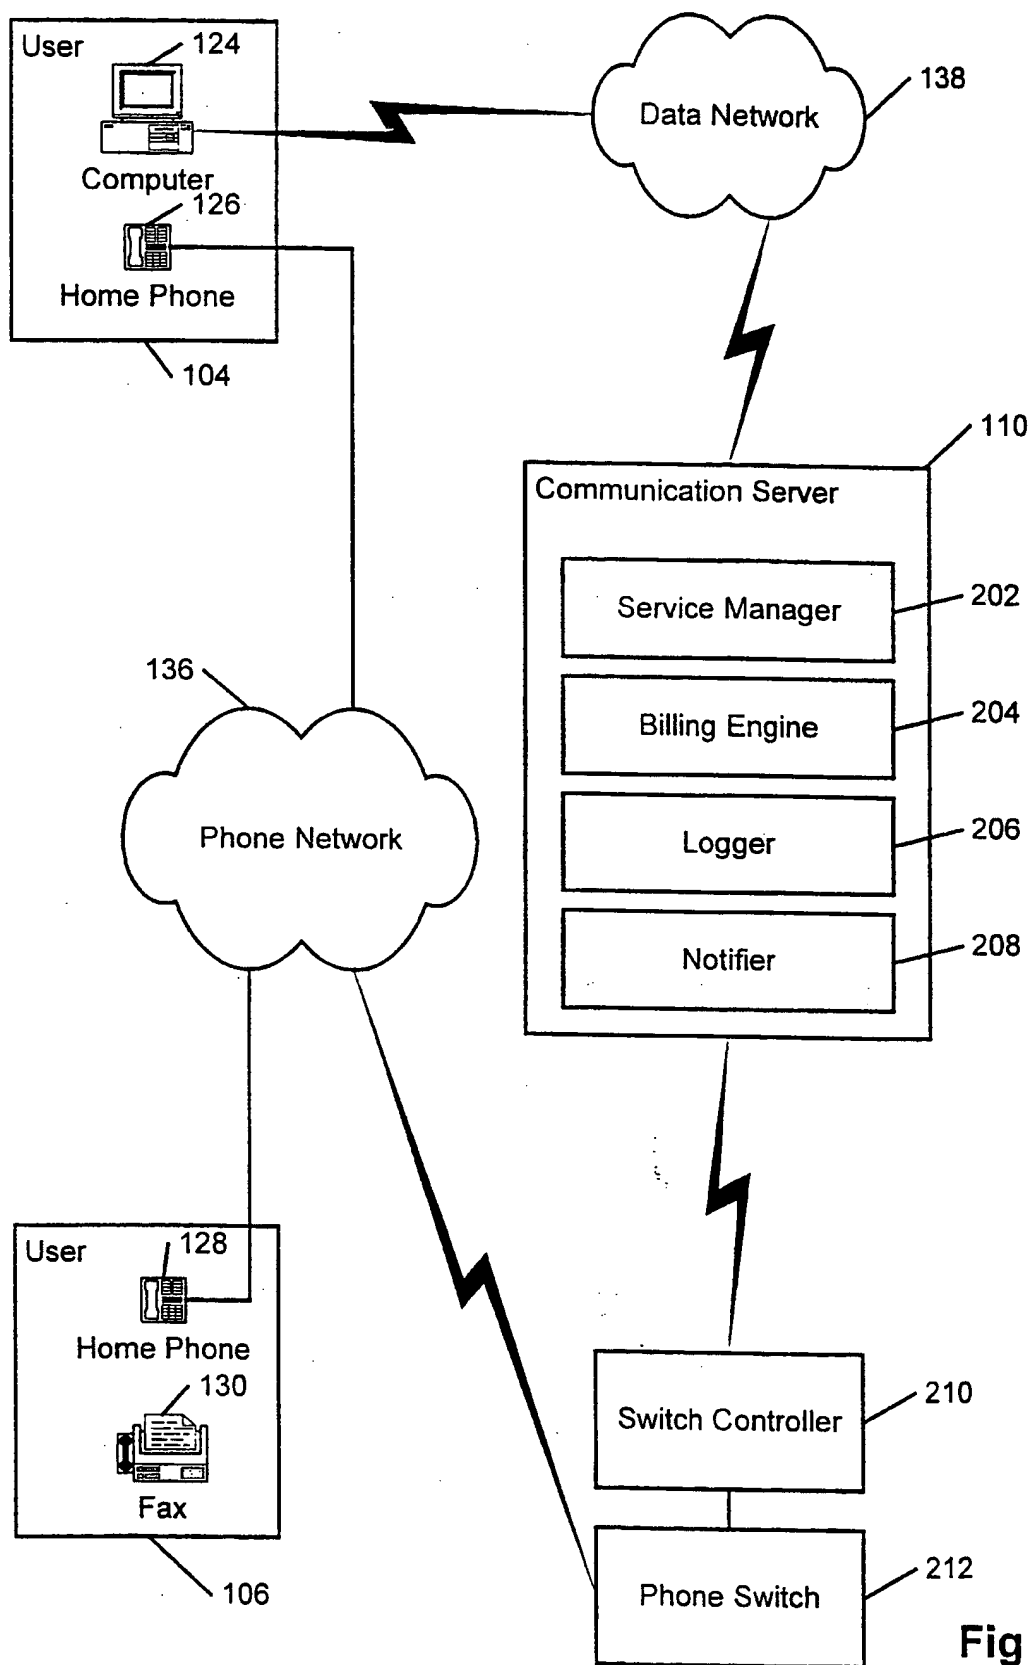


Fig 1

**Fig 2**



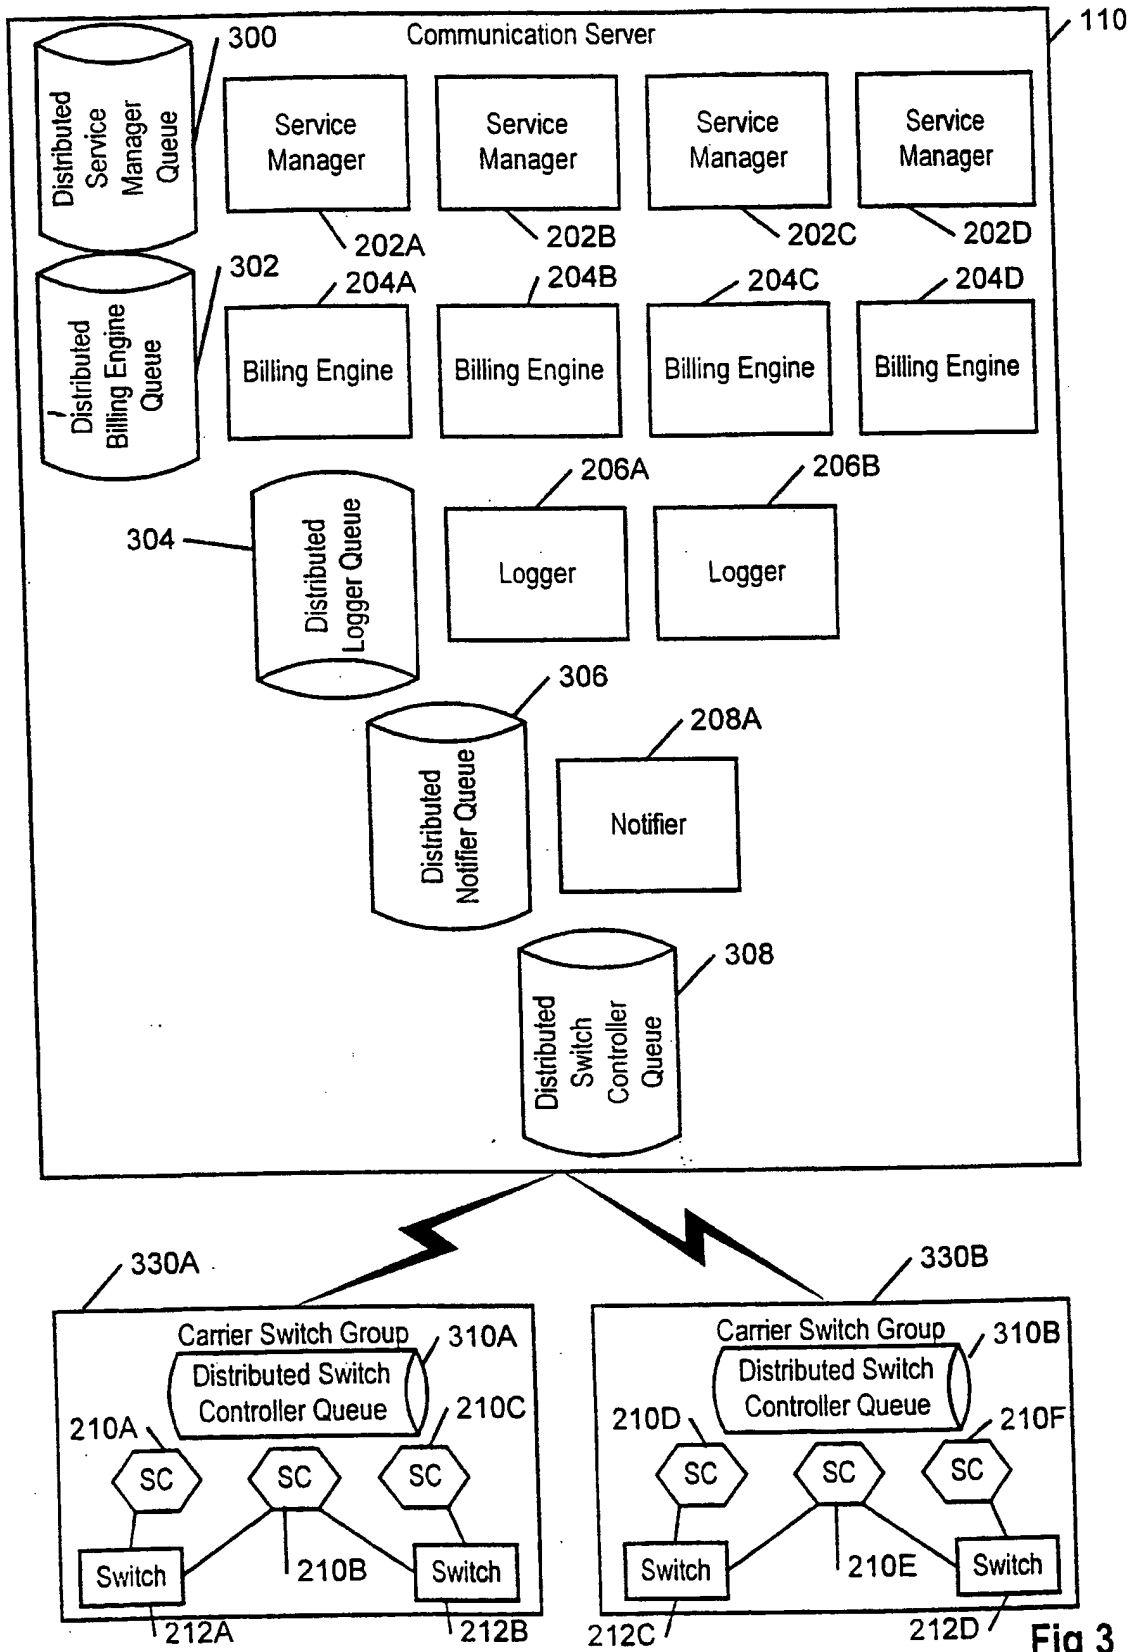
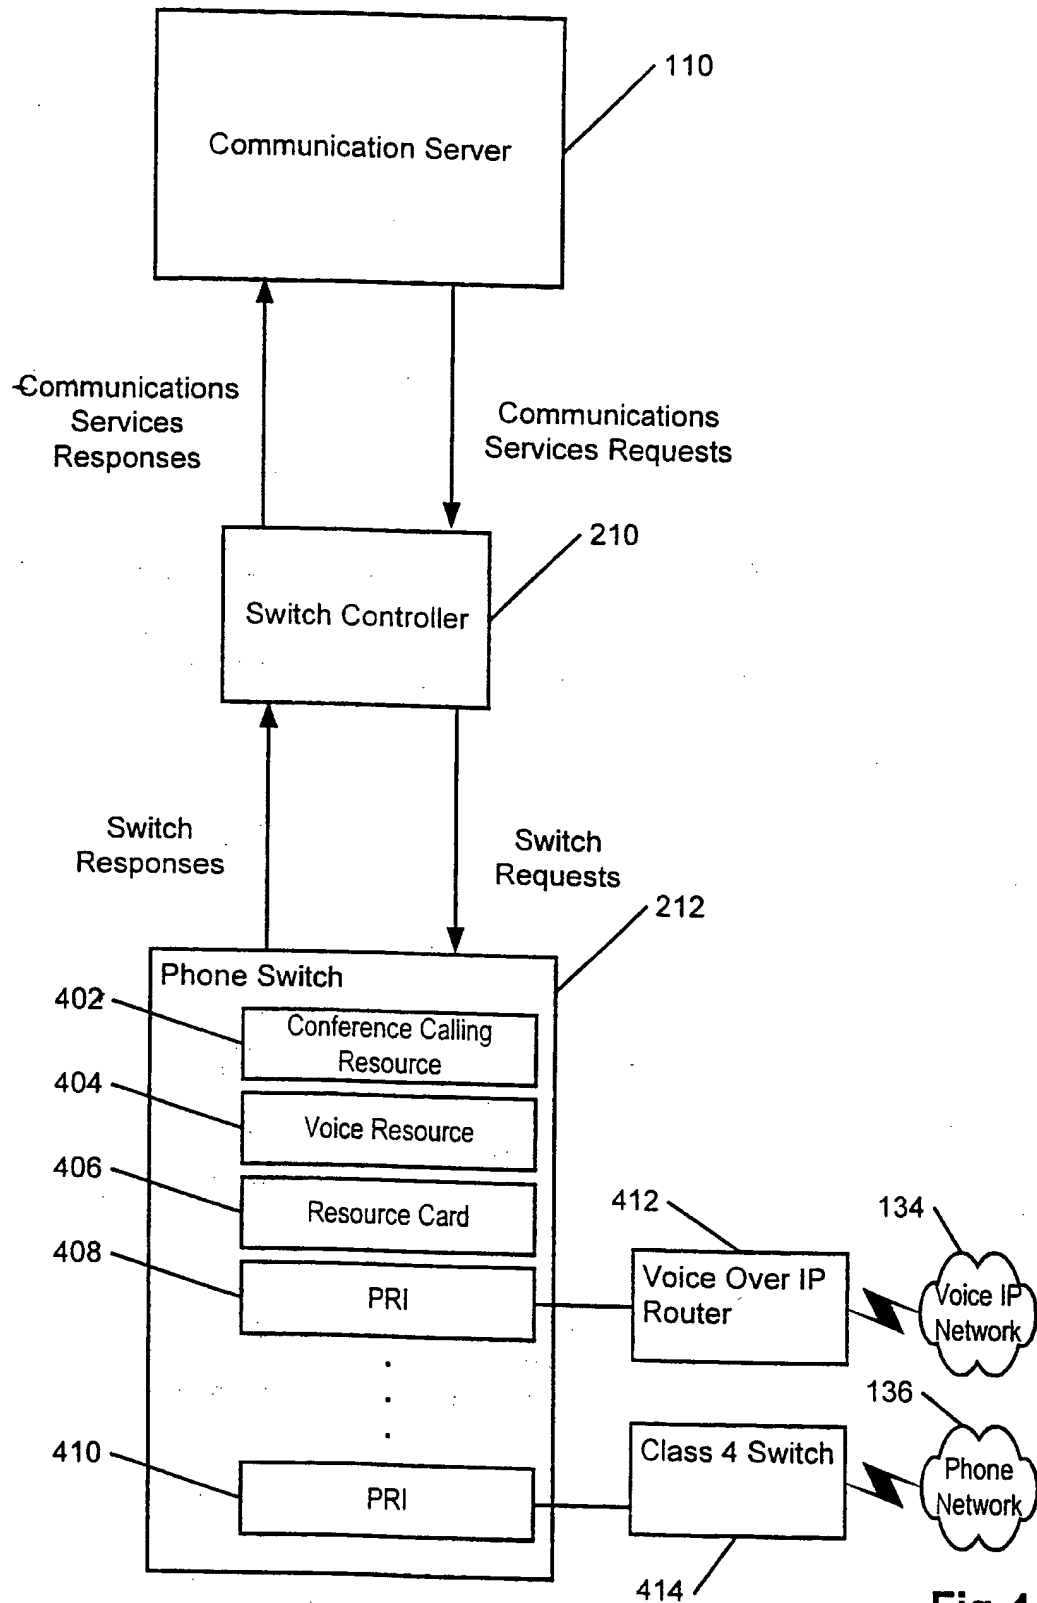


Fig 3

**Fig 4**

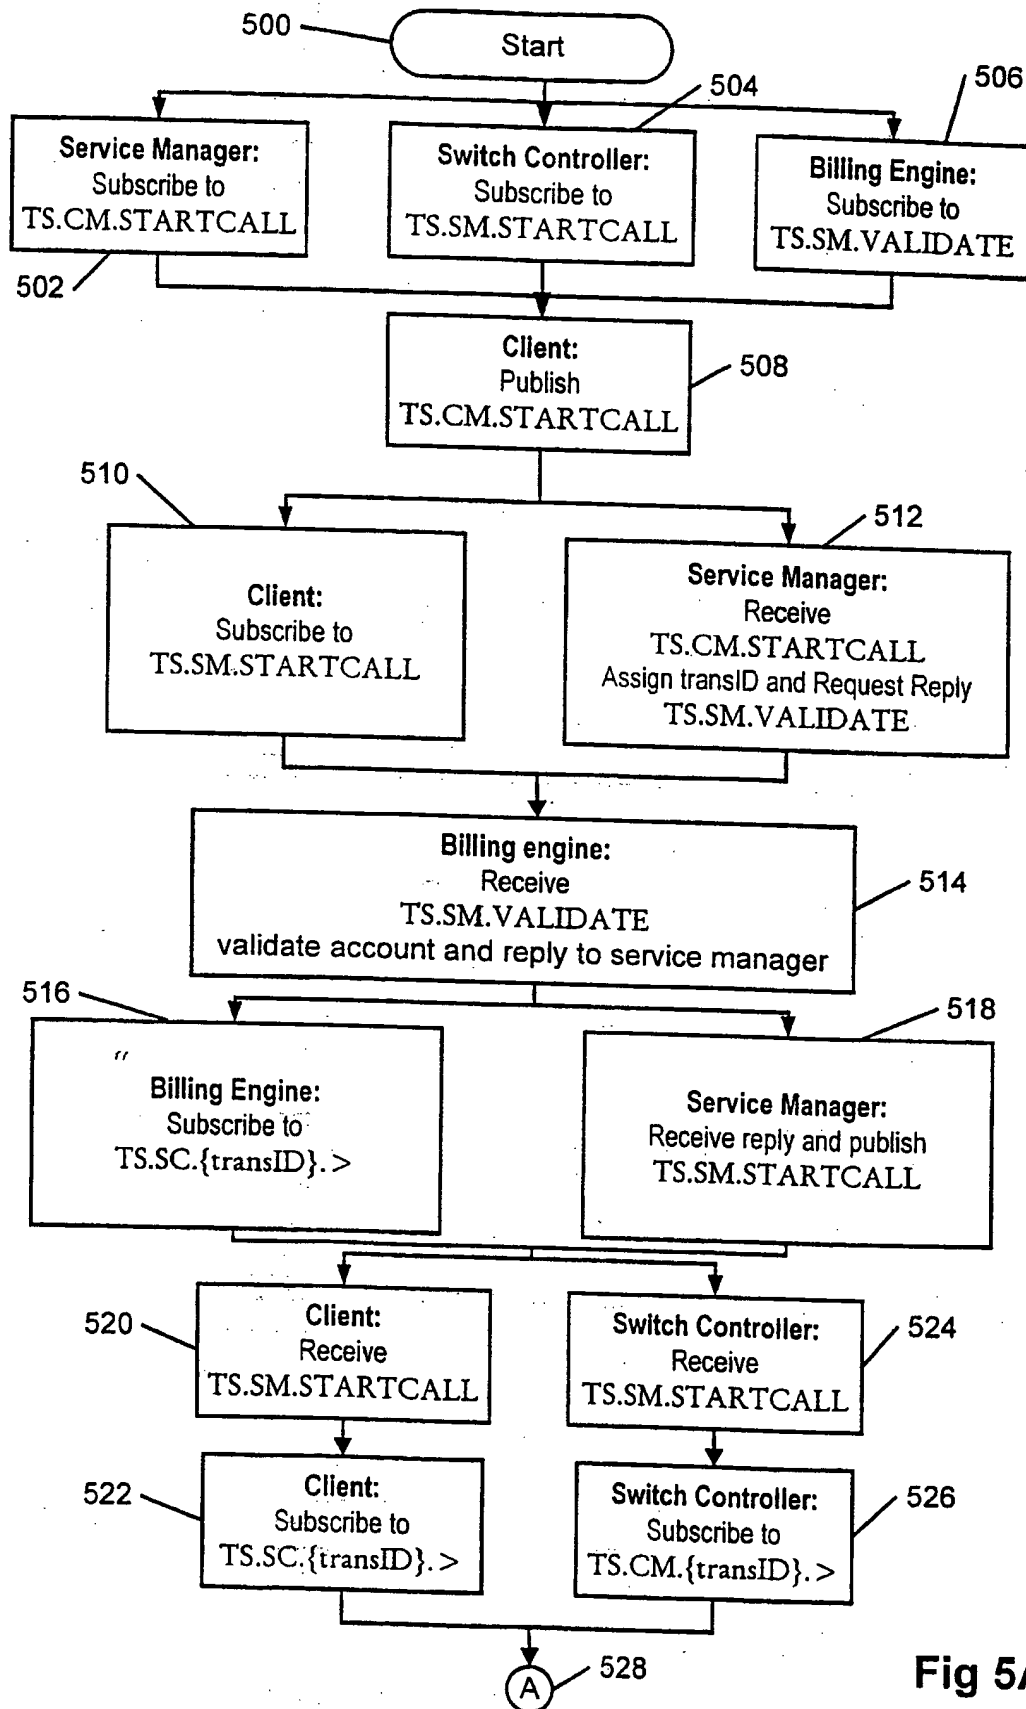


Fig 5A

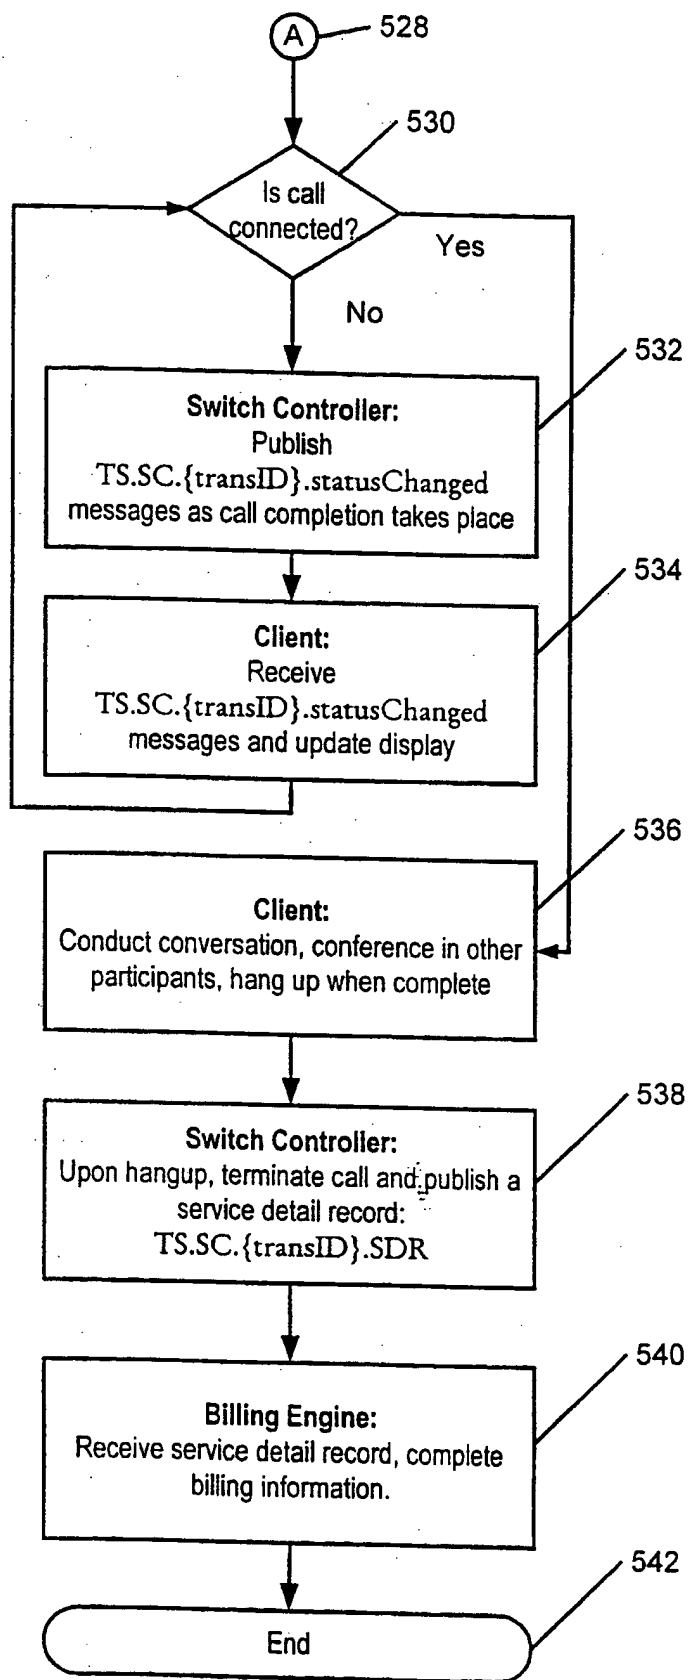


Fig 5B

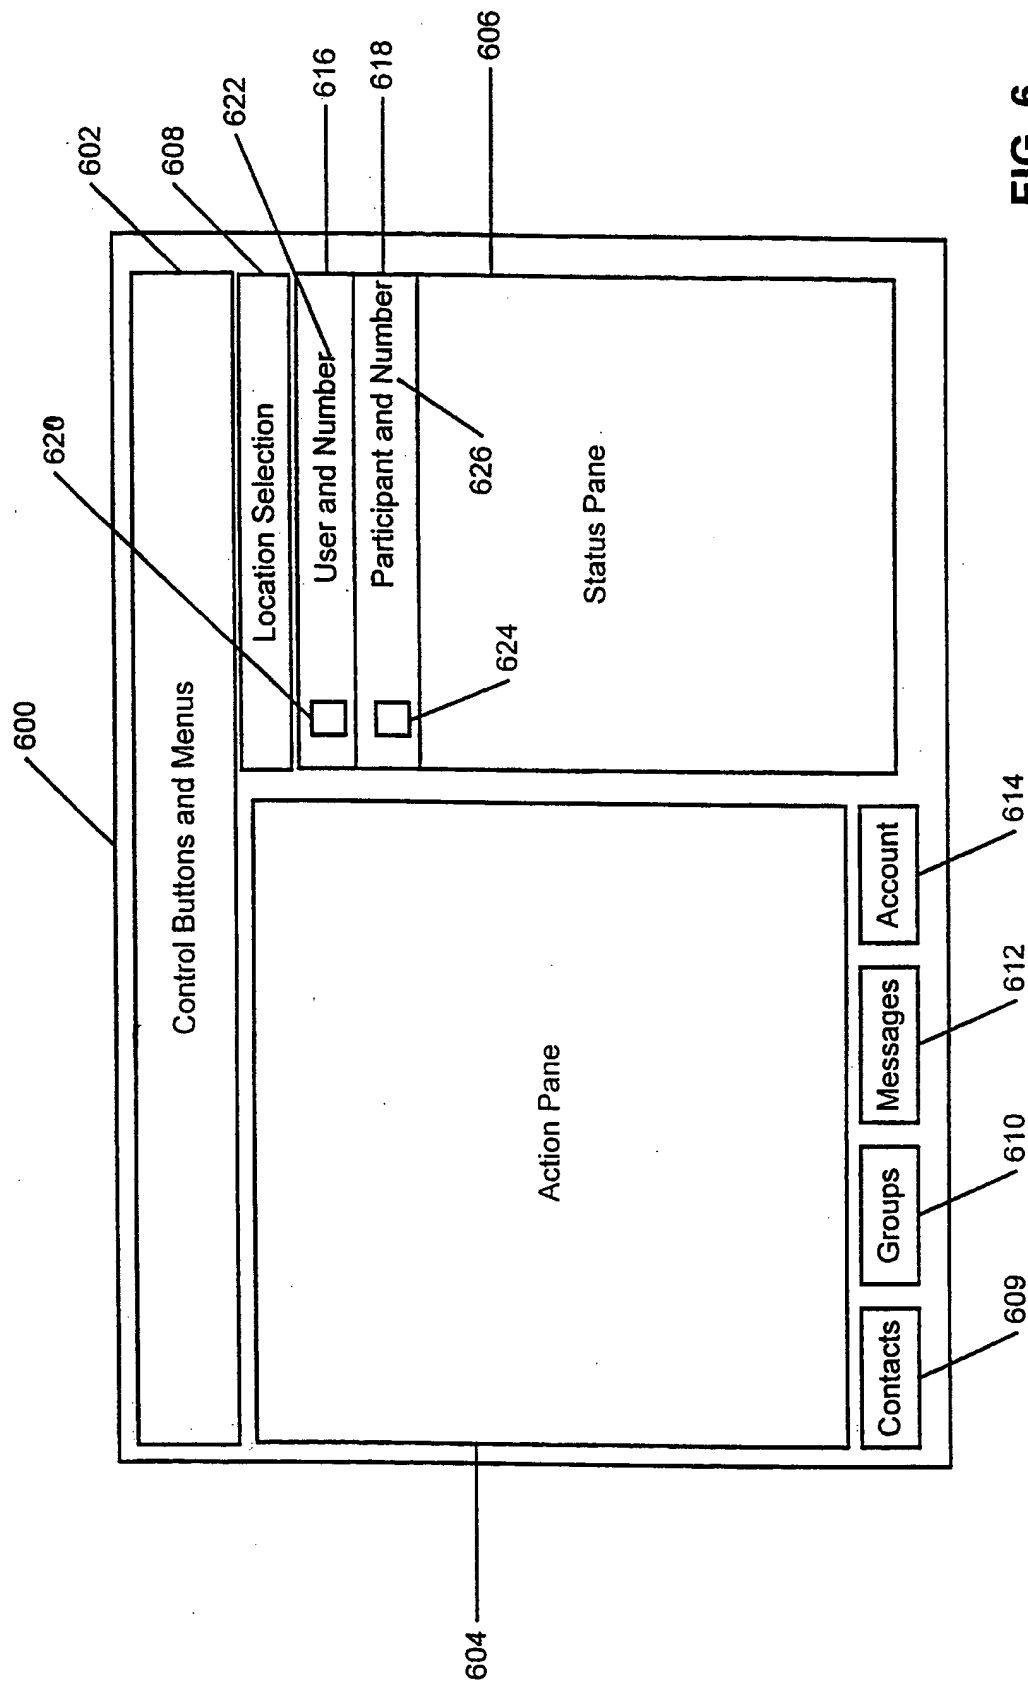


FIG. 6

# INTERNATIONAL SEARCH REPORT

International Application No  
**PCT/US 00/10355**

**A. CLASSIFICATION OF SUBJECT MATTER**  
**IPC 7 H04L29/06**

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)

**IPC 7 H04L**

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**EPO-Internal, WPI Data, PAJ**

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 609 016 A (AT & T CORP) 3 August 1994 (1994-08-03) abstract page 2, line 47 -page 3, line 33 page 5, line 25 - line 35 page 6, line 40 - line 51	1, 30, 45, 46, 72
A	US 5 491 800 A (GOLDSMITH AMY M ET AL) 13 February 1996 (1996-02-13) abstract column 1, line 26 - line 34 column 3, line 23 - line 40	1-72
A	US 5 706 434 A (KUNZELMAN KEVIN SCOTT ET AL) 6 January 1998 (1998-01-06) abstract column 5, line 21 - line 59	1-72

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

\* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

**20 July 2000**

Date of mailing of the international search report

**27/07/2000**

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
 NL - 2280 HV Rijswijk  
 Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
 Fax: (+31-70) 340-3016

Authorized officer

**Larcinese, C**

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. .Jonal Application No

PCT/US 00/10355

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0609016 A	03-08-1994	US 5442689 A CA 2112060 A DE 69413078 D DE 69413078 T ES 2120566 T JP 6253018 A	15-08-1995 30-07-1994 15-10-1998 18-03-1999 01-11-1998 09-09-1994
US 5491800 A	13-02-1996	AU 6902794 A CA 2169625 A DE 69406303 D EP 0725950 A JP 9507316 T WO 9517718 A	10-07-1995 29-06-1995 20-11-1997 14-08-1996 22-07-1997 29-06-1995
US 5706434 A	06-01-1998	NONE	